


Verlängerte Fittings

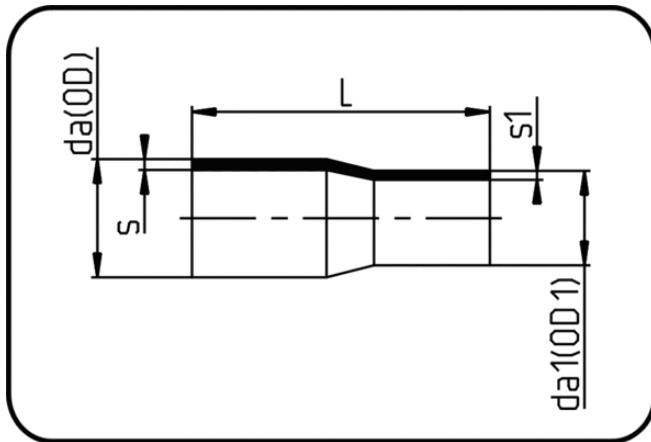

Code: 067

- Reduktion konzentrisch
- lange Schenkel
- W/P-TW
- formgespritzt
- **Stumpf+Heizwendelschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	L mm	s1 mm	Gewicht
90/63	70.067.9063.11	90/63 SDR11 PN16	90	63	8,2	172	5,8	0.29
110/63	70.067.1163.11	110/63 SDR11 PN16	110	63	10	178	5,8	0.42
110/90	70.067.1190.11	110/90 SDR11 PN16	110	90	10	177	8,2	0.50
125/63	70.067.1263.11	125/63 SDR11 PN16	125	63	11,4	195	5,8	0.56
125/90	70.067.1290.11	125/90 SDR11 PN16	125	90	11,4	200	8,2	0.64
125/110	70.067.1211.11	125/110 SDR11 PN16	125	110	11,4	200	10	0.71
140/125	70.067.1412.11	140/125 SDR11 PN16	140	125	12,7	211	11,4	0.97
160/90	70.067.1690.11	160/90 SDR11 PN16	160	90	14,6	217	8,2	1.01
160/110	70.067.1611.11	160/110 SDR11 PN16	160	110	14,6	222	10	1.14
160/125	70.067.1612.11	160/125 SDR11 PN16	160	125	14,6	231	11,4	1.27
160/140	70.067.1614.11	160/140 SDR11 PN16	160	140	14,6	229	12,7	1.36
180/125	70.067.1812.11	180/125 SDR11 PN16	180	125	16,4	245	11,4	1.61
180/160	70.067.1816.11	180/160 SDR11 PN16	180	160	16,4	245	14,6	1.86
200/160	70.067.2016.11	200/160 SDR11 PN16	200	160	18,2	252	14,6	2.25
225/160	70.067.2216.11	225/160 SDR11 PN16	225	160	20,5	262	14,6	2.76
250/160	70.067.2516.11	250/160 SDR11 PN16	250	160	22,7	314	14,6	3.98
250/225	70.067.2522.11	250/225 SDR11 PN16	250	225	22,7	315	20,5	4.74
280/250	70.067.2825.11	280/250 SDR11 PN16	280	250	25,4	355	22,7	6.64
315/225	70.067.3122.11	315/225 SDR11 PN16	315	225	28,6	375	20,5	7.84
315/250	70.067.3125.11	315/250 SDR11 PN16	315	250	28,6	375	22,7	8.32