


Kurzschenkelige Fittings

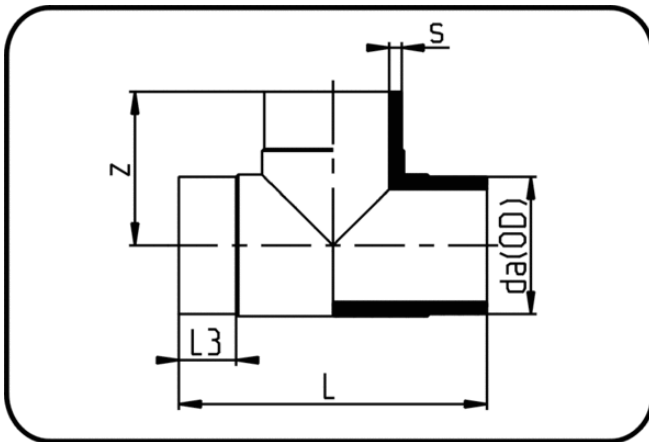

Code: 006

- T-Stück
- kurze Schenkel
- formgespritzt
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Gewicht
63	70.006.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	72	142	25	0.23
75	70.006.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	75	152	15	0.41
90	70.006.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	105	212	38	0.70
110	70.006.0110.11	110X10,0 SDR11 ISO S-5	110	10	122	253	51	1.24
125	70.006.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	140	277	52	1.66
140	70.006.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	152	304	53	2.48
160	70.006.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	170	340	57	3.44
180	70.006.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	182,5	365	57	4.60
200	70.006.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	200	400	57	6.32
225	70.006.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	220	440	57	8.56
250	70.006.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	235	466	72	11.16
280	70.006.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	270	536	80	16.20
315	70.006.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	270	540	80	19.70
355	70.006.0355.11	355X32,2 SDR11 ISO S-5	355	32,2	340	680	105	31.34
400	70.006.0400.11	400X36,3 SDR11 ISO S-5	400	36,3	350	695	103	39.30
450	70.006.0450.11	450X40,9 SDR11 ISO S-5	450	40,9	450	890	130	65.52
500	70.006.0500.11	500X45,4 SDR11 ISO S-5	500	45,4	450	900	130	73.72