


Kurzschenkelige Fittings

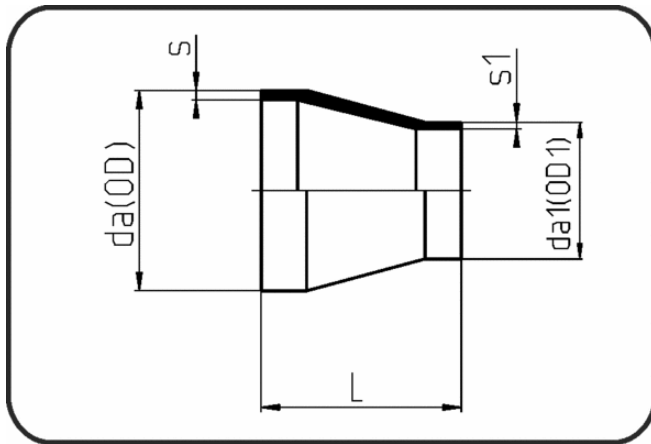

Code: 317

- Reduktion konzentrisch
- kurze Schenkel
- mechanisch gefertigt
- **Stumpfschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	L mm	s1 mm	Gewicht
355/200	70.317.3520.11	355/200 SDR11 ISO S-5	355	200	32,2	145	18,2	5.20
355/225	70.317.3522.11	355/225 SDR11 ISO S-5	355	225	32,2	135	20,5	4.60
355/250	70.317.3525.11	355/250 SDR11 ISO S-5	355	250	32,2	125	22,7	4.46
355/280	70.317.3528.11	355/280 SDR11 ISO S-5	355	280	32,2	115	25,4	4.00
355/315	70.317.3531.11	355/315 SDR11 ISO S-5	355	315	32,2	100	28,6	3.30
400/250	70.317.4025.11	400/250 SDR11 ISO S-5	400	250	36,3	145	22,7	6.20
400/280	70.317.4028.11	400/280 SDR11 ISO S-5	400	280	36,3	130	25,4	6.20
400/315	70.317.4031.11	400/315 SDR11 ISO S-5	400	315	36,3	125	28,6	6.20
400/355	70.317.4035.11	400/355 SDR11 ISO S-5	400	355	36,3	110	32,2	4.60
450/315	70.317.4531.11	450/315 SDR11 ISO S-5	450	315	40,9	145	28,6	6.80
450/355	70.317.4535.11	450/355 SDR11 ISO S-5	450	355	40,9	130	32,2	7.80
450/400	70.317.4540.11	450/400 SDR11 ISO S-5	450	400	40,9	110	36,3	7.27
500/280	70.317.5028.11	500/280 SDR11 ISO S-5	500	280	45,4	180	25,4	11.90
500/315	70.317.5031.11	500/315 SDR11 ISO S-5	500	315	45,4	165	28,6	11.70
500/355	70.317.5035.11	500/355 SDR11 ISO S-5	500	355	45,4	150	32,2	9.83
500/400	70.317.5040.11	500/400 SDR11 ISO S-5	500	400	45,4	135	36,3	9.40
500/450	70.317.5045.11	500/450 SDR11 ISO S-5	500	450	45,4	120	40,9	8.30
560/225	70.317.5622.11	560/225 SDR11 ISO S-5	560	225	50,8	240	20,5	10.50
560/450	70.317.5645.11	560/450 SDR11 ISO S-5	560	450	50,8	145	40,9	13.00
560/500	70.317.5650.11	560/500 SDR11 ISO S-5	560	500	50,8	130	45,4	11.00
630/315	70.317.6331.11	630/315 SDR11 ISO S-5	630	315	57,2	240	28,6	19.00
630/400	70.317.6340.11	630/400 SDR11 ISO S-5	630	400	57,2	190	36,3	20.60
630/450	70.317.6345.11	630/450 SDR11 ISO S-5	630	450	57,2	175	40,9	19.30
630/500	70.317.6350.11	630/500 SDR11 ISO S-5	630	500	57,2	160	45,4	19.00
630/560	70.317.6356.11	630/560 SDR11 ISO S-5	630	560	57,2	140	50,8	14.80