


Rohrbögen

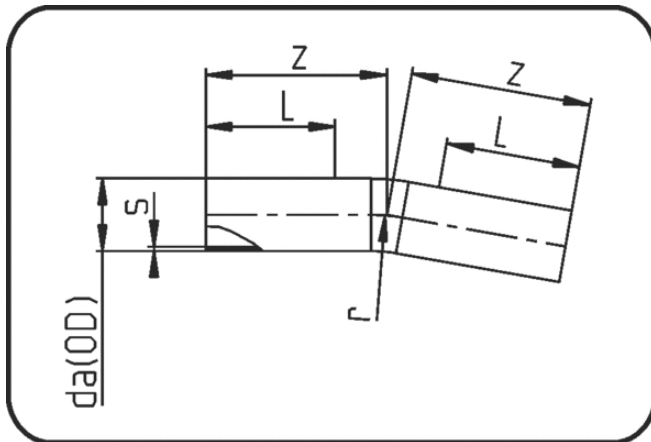

Code: 394

- Rohrbogen 11°
- Radius 1,5 x da
- aus Rohr geformt
- **Stumpf+Heizwendelschweissung**
- **PE 100-RC schwarz**

** Auf Anfrage.

Dimension	Code	Detail	da(OD) mm	s mm	z mm	r mm	L mm	Gewicht
90	70.394.0090.09	90 SDR9 ISO S-4 20 bar	90	10,1	210	135	150	1.70
110	70.394.0110.09	110 SDR9 ISO S-4 20 bar	110	12,3	220	165	150	2.48
125	70.394.0125.09	125 SDR9 ISO S-4 20 bar	125	14	240	188	150	4.06
140	70.394.0140.09	140 SDR9 ISO S-4 20 bar	140	15,7	250	210	150	4.75
160	70.394.0160.09	160 SDR9 ISO S-4 20 bar	160	17,9	260	240	150	6.65
180	70.394.0180.09	180 SDR9 ISO S-4 20 bar	180	20,1	280	270	150	8.99
200	70.394.0200.09	200 SDR9 ISO S-4 20 bar	200	22,4	290	300	150	12.20
225	70.394.0225.09	225 SDR9 ISO S-4 20 bar	225	25,2	300	338	150	16.00
250	70.394.0250.09	250 SDR9 ISO S-4 20 bar	250	27,9	410	375	250	21.19
280	70.394.0280.09	280 SDR9 ISO S-4 20 bar	280	31,3	420	420	250	26.64
315	70.394.0315.09	315 SDR9 ISO S-4 20 bar	315	35,2	450	496	300	39.00
355	70.394.0355.09	355 SDR9 ISO S-4 20 bar	355	39,7	500	560	300	55.30
400	70.394.0400.09	400 SDR9 ISO S-4 20 bar	400	44,7	520	637	300	66.20
450	70.394.0450.09	450 SDR9 ISO S-4 20 bar	450	50,3	550	711	300	83.96
500	70.394.0500.09	500 SDR9 ISO S-4 20 bar	500	55,8	570	783	350	117.00
560	70.394.0560.09	560 SDR9 ISO S-4 20 bar	560	62,5	600	877	350	150.00
630	70.394.0630.09	630 SDR9 ISO S-4 20 bar	630	70,3	850	955	350	200.00