


## Fittings

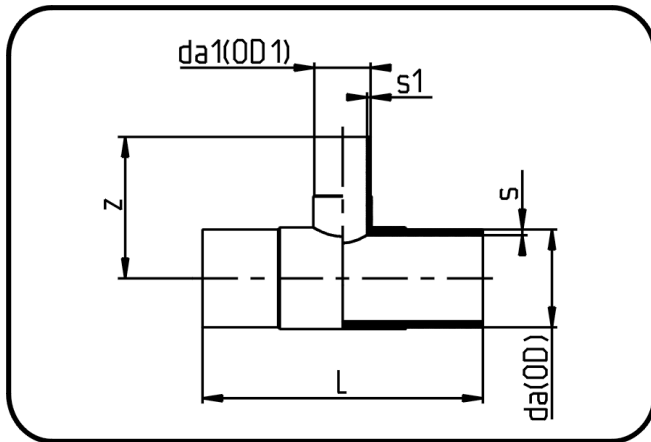

Code: 065

- T-Stück reduziert
- lange Schenkel
- formgespritzt
- Stumpf+IR-Schweissung
- PP Pure grau

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	z mm	L mm	s1 mm	Gewicht
63/32	72.065.6332.11	63/32 SDR11 ISO S-5	63	32	5,8	92	230,5	2,9	0.29
63/40	72.065.6340.11	63/40 SDR11 ISO S-5	63	40	5,8	96	229	3,7	0.30
63/50	72.065.6350.11	63/50 SDR11 ISO S-5	63	50	5,8	102,5	231	4,6	0.30
75/32	72.065.7532.11	75/32 SDR11 ISO S-5	75	32	6,8	107,5	265	2,9	0.49
75/50	72.065.7550.11	75/50 SDR11 ISO S-5	75	50	6,8	110	265	4,6	0.53
75/63	72.065.7563.11	75/63 SDR11 ISO S-5	75	63	6,8	119	260	5,8	0.55
90/63	72.065.9063.11	90/63 SDR11 ISO S-5	90	63	8,2	138,5	275	5,8	0.73
90/75	72.065.9075.11	90/75 SDR11 ISO S-5	90	75	8,2	140	278	6,8	0.82
110/63	72.065.1163.11	110/63 SDR11 ISO S-5	110	63	10	159	315	5,8	1.20
110/75	72.065.1175.11	110/75 SDR11 ISO S-5	110	75	10	151	315	6,8	1.17
110/90	72.065.1190.11	110/90 SDR11 ISO S-5	110	90	10	156	317	8,2	1.27
125/90	72.065.1290.11	125/90 SDR11 ISO S-5	125	90	11,4	170	340	8,2	1.79
125/110	72.065.1211.11	125/110 SDR11 ISO S-5	125	110	11,4	170	345,5	10	1.85
160/63	72.065.1663.11	160/63 SDR11 ISO S-5	160	63	14,6	169	357,5	5,8	2.70
160/75	72.065.1675.11	160/75 SDR11 ISO S-5	160	75	14,6	179	358	6,8	2.73
160/90	72.065.1690.11	160/90 SDR11 ISO S-5	160	90	14,6	186	358	8,2	2.78
160/110	72.065.1611.11	160/110 SDR11 ISO S-5	160	110	14,6	190	359	10	2.87
180/90	72.065.1890.11	180/90 SDR11 ISO S-5	180	90	16,4	196	372	8,2	3.56
180/110	72.065.1811.11	180/110 SDR11 ISO S-5	180	110	16,4	202	373	10	3.63
200/63	72.065.2063.11	200/63 SDR11 ISO S-5	200	63	18,2	226	560	5,8	7.11
200/90	72.065.2090.11	200/90 SDR11 ISO S-5	200	90	18,2	230	560	8,2	6.75
200/110	72.065.2011.11	200/110 SDR11 ISO S-5	200	110	18,2	245	560	10	7.05
200/125	72.065.2012.11	200/125 SDR11 ISO S-5	200	125	18,2	240	560	11,4	6.92
200/160	72.065.2016.11	200/160 SDR11 ISO S-5	200	160	18,2	275	564	14,6	8.30
225/75	72.065.2275.11	225/75 SDR11 ISO S-5	225	75	20,5	226	455	6,8	6.68
225/90	72.065.2290.11	225/90 SDR11 ISO S-5	225	90	20,5	226	456	8,2	6.76
225/110	72.065.2211.11	225/110 SDR11 ISO S-5	225	110	20,5	226	456	10	6.76
225/160	72.065.2216.11	225/160 SDR11 ISO S-5	225	160	20,5	250	498	14,6	8.14

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	z mm	L mm	s1 mm	Gewicht
225/180	72.065.2218.11	225/180 SDR11 ISO S-5	225	180	20,5	277	558	16,4	9.54
250/110	72.065.2511.11	250/110 SDR11 ISO S-5	250	110	22,7	247	632	10	12.31
250/160	72.065.2516.11	250/160 SDR11 ISO S-5	250	160	22,7	272	634	14,6	13.28