


Verlängerte Fittings

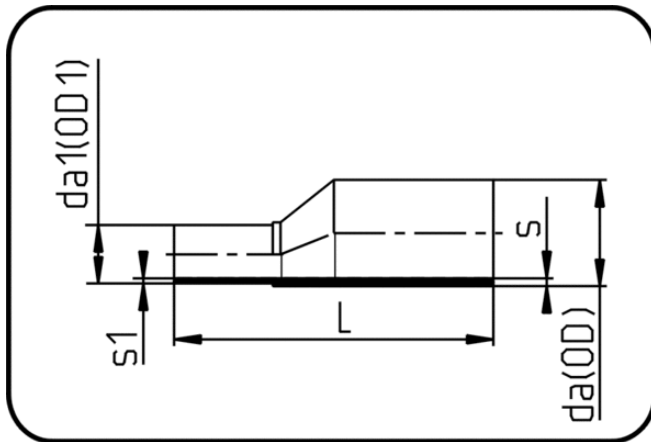

Code: 069

- Reduktion exzentrisch
- lange Schenkel
- W/P-TW
- formgespritzt
- **Stumpf+Heizwendelschweissung**
- **PE 100-RC schwarz**

Dimension	Code	Detail	da(OD) mm	da(OD1) mm	s mm	L mm	s1 mm	Gewicht
75/63	70.069.7563.11	75/63 SDR11 PN16	75	63	6,8	197	5,8	0.26
90/63	70.069.9063.11	90/63 SDR11 PN16	90	63	8,2	213	5,8	0.38
90/75	70.069.9075.11	90/75 SDR11 PN16	90	75	8,2	214	6,8	0.40
110/63	70.069.1163.11	110/63 SDR11 PN16	110	63	10	244	5,8	0.59
110/90	70.069.1190.11	110/90 SDR11 PN16	110	90	10	244	8,2	0.67
125/63	70.069.1263.11	125/63 SDR11 PN16	125	63	11,4	268	5,8	0.82
125/90	70.069.1290.11	125/90 SDR11 PN16	125	90	11,4	265	8,2	0.91
125/110	70.069.1211.11	125/110 SDR11 PN16	125	110	11,4	260	10	0.98
140/125	70.069.1412.11	140/125 SDR11 PN16	140	125	12,7	283	11,4	1.32
160/90	70.069.1690.11	160/90 SDR11 PN16	160	90	14,6	309	8,2	1.52
160/110	70.069.1611.11	160/110 SDR11 PN16	160	110	14,6	305	10	1.63
160/125	70.069.1612.11	160/125 SDR11 PN16	160	125	14,6	309	11,4	1.69
160/140	70.069.1614.11	160/140 SDR11 PN16	160	140	14,6	308	12,7	1.88
180/90	70.069.1890.11	180/90 SDR11 PN16	180	90	16,4	348	8,2	2.26
180/125	70.069.1812.11	180/125 SDR11 PN16	180	125	16,4	345	11,4	2.46
180/160	70.069.1816.11	180/160 SDR11 PN16	180	160	16,4	345	14,6	2.78
200/160	70.069.2016.11	200/160 SDR11 PN16	200	160	18,2	373	14,6	3.32
200/180	70.069.2018.11	200/180 SDR11 PN16	200	180	18,2	373	16,4	3.67
225/160	70.069.2216.11	225/160 SDR11 PN16	225	160	20,5	402	14,6	4.37
225/180	70.069.2218.11	225/180 SDR11 PN16	225	180	20,5	403	16,4	4.62
225/200	70.069.2220.11	225/200 SDR11 PN16	225	200	20,5	403	18,2	4.95
250/200	70.069.2521.11	250/200 SDR11 PN16	250	200	22,7	440	18,2	6.28
250/225	70.069.2522.11	250/225 SDR11 PN16	250	225	22,7	440	20,5	6.84